



LITETITE®



From **ROLASOLV®** - for Marine Interior Areas

LITETITE® is the complete blackout fabric roller shade – **ideal for environments where very dark or total blackout conditions are sometimes required**, for example; chart rooms, control rooms, cinemas, training rooms, laboratories, workshops and accommodation areas.

LITETITE® is housed in a protective anodised aluminium cassette complete with inner and outer aluminium side channels that prevent light entering.

Available in a large selection of fabric colours **LITETITE®** effortlessly turns day into night, ensuring total privacy and giving a warm homely feel. The large selection of fabric colours means it can be perfectly co-ordinated to your other room decorations.

The aluminium side channels, cassette and bottom rail can also be co-ordinated to your choice of colour.



Like all Solar Solve products, **LITETITE®** is designed with our customer in mind to ensure it is easy to install and simple to operate.

With first class **custom-made products, fast delivery, quality packaging, spare parts included, excellent after sales service** and a **1-year guarantee** you'll wonder how you ever managed without **LITETITE®**.

For more information

Contact our Customer Services Department on:

Tel. +44 (0) 191 454 8595


Fax. +44 (0) 191 454 8692

Email. info@rolasolv.com


Visit. www.rolasolv.com

Types of Operation

There are several types of operation available for LITETITE® roller blinds, the most common being shown below. Please contact our Technical Department for additional information.

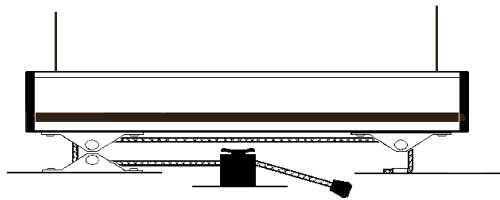

**DOUBLE PULLEY BOTTOM RAIL
CONSTANT TENSION SPRING
OUTSIDE RECESS ONLY**

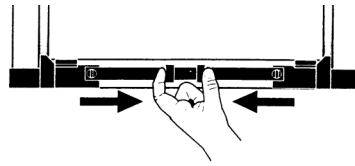


**CONSTANT TENSION SPRING
CENTRE RELEASE
INSIDE OR OUTSIDE RECESS**




**CONSTANT TENSION SPRING
CENTRE PULL
OUTSIDE RECESS ONLY**

ALL SPRING OPERATED BLINDS WITH PULL CORD ARE SUPPLIED WITH A CORD CLEAT

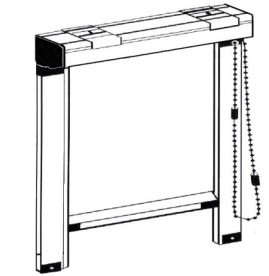

**LEFT OR RIGHT HAND
SIDE CHAIN CLUTCH**

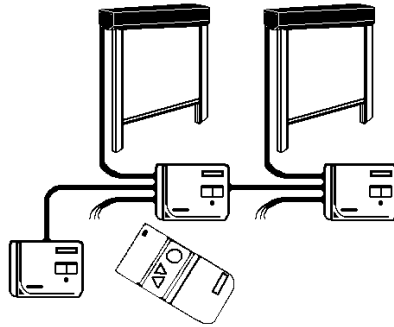

ELECTRIC BY REMOTE CONTROL, GROUP CONTROL AND / OR LOCAL INDIVIDUAL CONTROL - IDEAL FOR BLINDS THAT ARE DIFFICULT TO ACCESS.



LOW VOLTAGE (LoVo—24V D.C.) IS AVAILABLE FOR SMALLER SIZED ROLLER BLINDS. HIGH VOLTAGE (HiVo—230V A.C., 50HZ OR 60HZ) IS AVAILABLE OVER THE FULL RANGE OF ROLLER BLIND SIZES. CONTACT THE TECHNICAL DEPARTMENT FOR MORE DETAILS.

Choice of Fabrics

A large selection of Flame Retardant fabric types and colours are available. Standard ranges include the following:

Blackout Fabric – 67% PVC, 24% Fibre Glass, 8% Adhesive France-M1 Fire Classification. Easily cleaned with soap and water. Available in 6 standard colours: - Navy Blue, Cream, Ecru, White, Grey and Black. Other colours available on request.

Types of Fixing

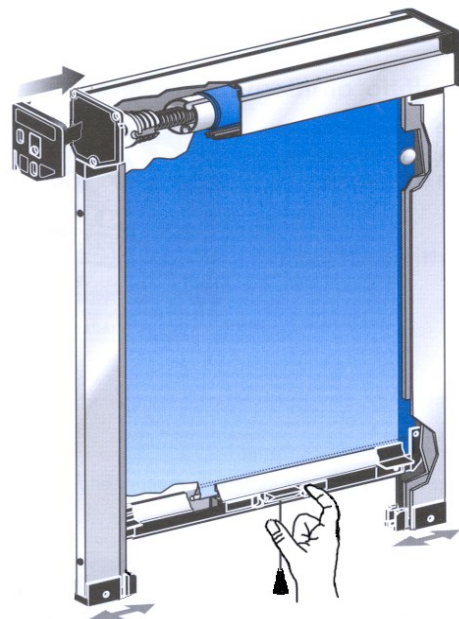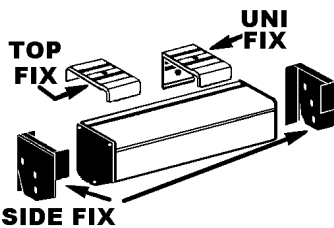

Max and Min Dimensions

Maximum and minimum dimensions vary depending on the type of operation and are shown below in mm.

Type of Operation	Max Width	Max Drop	Min Width	Min Drop
Const Ten Spring	3500	3500	450	250
Sidechain Clutch	3500	3500	350	250
LoVo Electric	1500	2200	400	250
HiVo Electric	3500	3500	600	250

Technical Services:- If you require any advice or assistance with measuring, installation, wiring or operation please contact us. More detailed technical information sheets are available on request

Customer Services:- If you require general information, advice or assistance with placing orders or requesting quotations then please contact us. Quotation and Order forms can be immediately forwarded on request.